



CM 150







CM 50




per caratteristiche-varianti costruttive pag. 80 - for features schedule-constructional variances pag. 80

TIPO - TYPE		P ₂ nom. HP/kW	P ₁ (kW) CAx. 1 ~ 3 ~		AMPERE		Q = portata - débit - capacity - Fördermenge - caudal																
1 ~ 230 V - 50 Hz	3 ~ 230/400 V 50 Hz				1 ~ 1 x 230V	3 ~ 3 x 400 V	m³/h	0.6	1.2	1.8	2.7	3.6	4.5	5.4	6.3	7.2	8.4	12	15	18			
							l/1'	10	20	30	45	60	75	90	105	120	140	200	250	300			
							Prevalenza CANometrica totale in m. C.A. Hauteur CANométrique totale en m. - Total head in meters w.c. Förderhöhe m. - Altura de impulsión CANométrica total en m.																
CM 50	CMT 50	0.5/0.37	0.59	0.65	2.8	1.1	21.5	21	19	17.5	16	14	12										
CM 75	CMT 75	0.8/0.59	0.9	0.94	4.5	1.7	26.5	26	25	23.5	22	20	17.5	14									
CM 100	CMT 100	1/0.74	1.16	1.17	5.7	2	33	32.5	31.5	30.5	29.5	27.5	25	21									
CM 150	CMT 150	1.5/1.1	1.85	1.85	8.8	3.4	40.5	40	39	38	37	34.5	31	27.5									
-	CMT 200	2.2/1.65	-	2.30	-	4.2	50.5	50	49	47.5	46	44.5	42	39	35								
-	CMT 300	3/2.2	-	2.85	-	5.2	58.5	58	57	56	55	54	51	48	44	35							
CM 154	CMT 154	1.5/1.1	1.85	1.85	8.8	3.4	40.5	40	39	38	37	34.5	31	27.5									
-	CMT 204	2.2/1.65	-	2.30	-	4.2	50.5	50	49	47.5	46	44.5	42	39	35								
-	CMT 304	3/2.2	-	2.85	-	5.2	58.5	58	57	56	55	54	51	48	44	35							
CM 400	CMT 400	4/3	4.65	3.80	21	6.8	46.5	46.3	46.2	46	45.2	44.8	43.5	42.9	42	41.1	37.5	32.5					
-	CMT 550	5.5/4	-	5.20	-	9.6	56.1	55.8	55.7	55	54.9	54.9	54.5	53.9	53.5	52.1	50	46	40				

TIPO TYPE	Dimensioni mm Dimensions mm Dimensions mm Masstabelle mm Dimensiones mm										Dimensioni imballo mm Dimensions d'emballage mm Packing dimensions mm VerpackungCAsse mm Dimensiones embalaje mm			Peso Poids Weight Gewicht Peso kg
	A	B	C	D	E	F	H1	H2	DNA	DNM	I	L	M	
CM 50	95	44	265	150	110	160	82	202	1"G	1"G	290	175	225	9
CM 75	110	45	300	180	140	185	97	234	1"G	1"G	325	200	265	12.7
CM 100	110	45	300	180	140	185	97	234	1"G	1"G	325	200	265	14
CM 150	117	45	348	220	180	225	115	285	1"G	1"G	370	240	315	22.5
CMT 154	117	45	348	220	180	225	115	285	1"1/4 G	1"G	370	240	315	22.5
CMT 200	117	45	348	220	180	225	115	285	1"G	1"G	370	240	315	23
CMT 204	117	45	348	220	180	225	115	285	1"1/4 G	1"G	370	240	315	23
CMT 300	117	45	348	220	180	225	115	285	1"G	1"G	370	240	315	23.5
CMT 304	117	45	348	220	180	225	115	285	1"1/4 G	1"G	370	240	315	23.5
CM 400	108	58	425	240	190	250	133	323	2"G	1"1/4 G	440	270	360	39.8
CMT 550	108	58	425	240	190	250	133	323	2"G	1"1/4 G	440	270	360	39.8

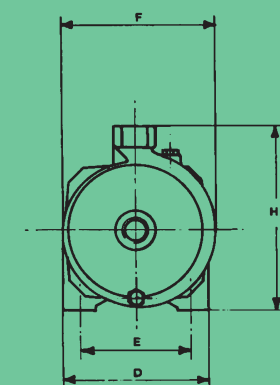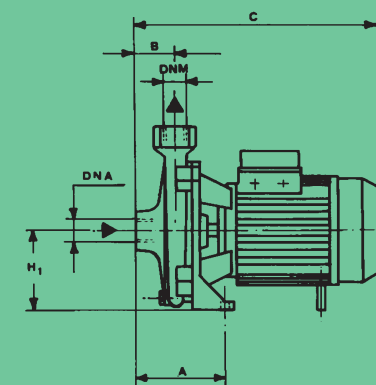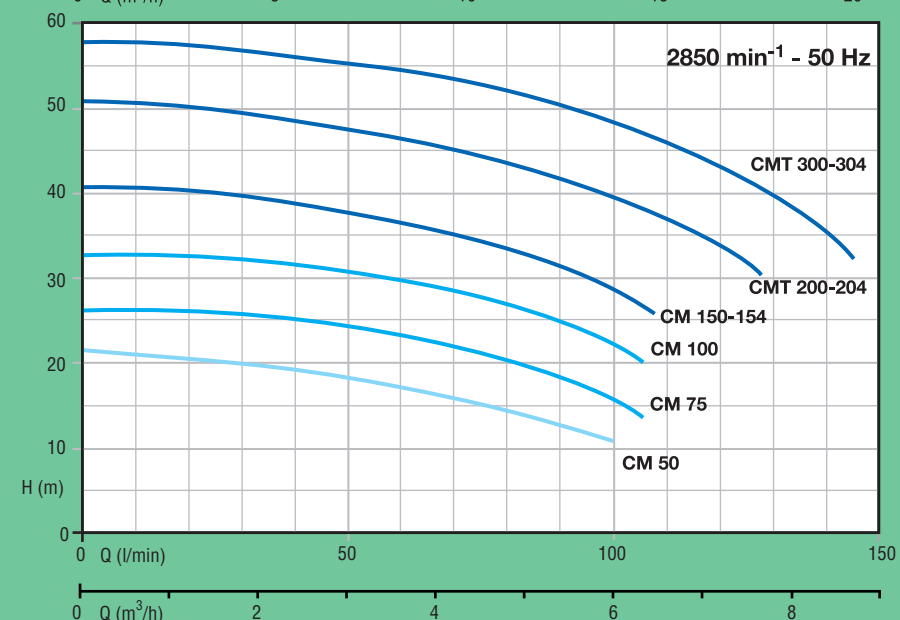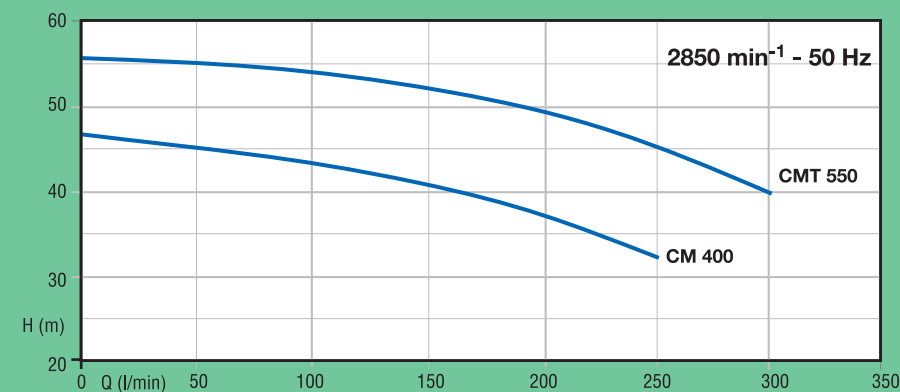

- **serie CM**
elettropompe centrifughe
1 girante
- **serie CM**
electropompes centrifuges
1 turbine
- **serie CM**
centrifugal electric pumps
1 impeller
- **baureihe CM**
Kreisel-Elektropumpen
1 Laufrad
- **serie CM**
electrobombas centrifugas
1 rodete



南京亚勤科贸有限公司
<http://www.chinayaqin.com>
Tel:025-57045861
Fax:025-57055861
24小时服务热线：025-51968090