



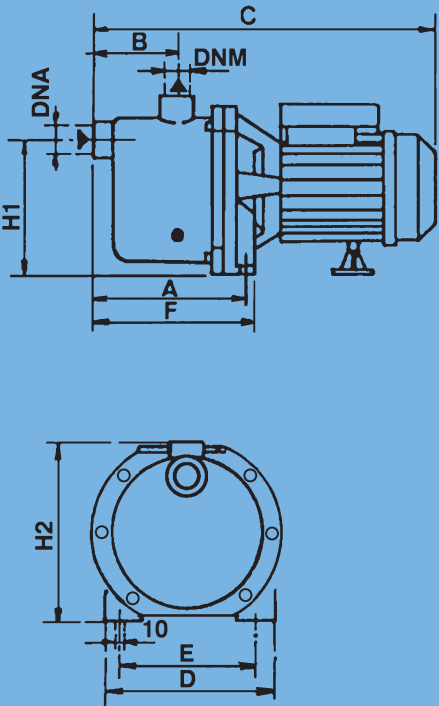

per caratteristiche-varianti costruttive pag. 80 - for features schedule-constructional variances pag. 80

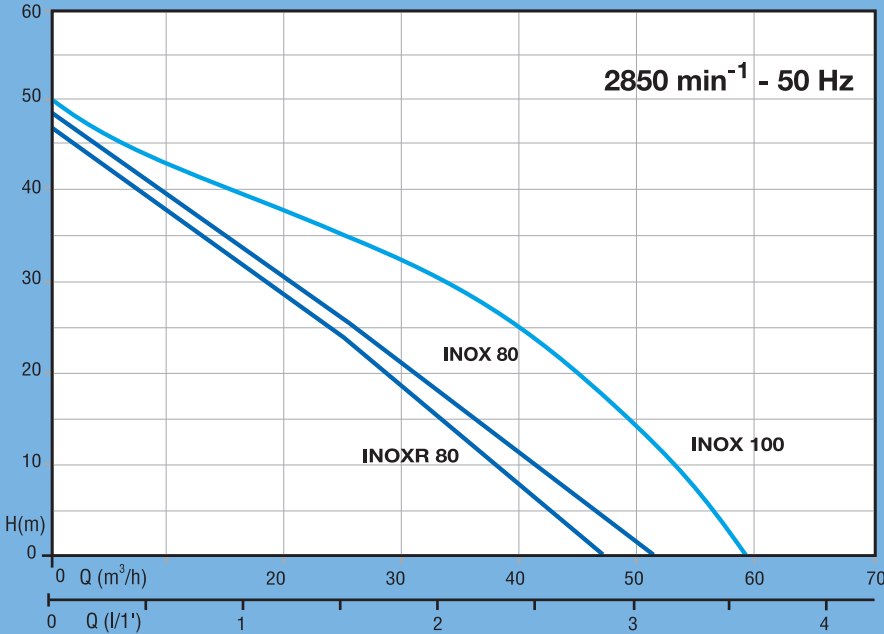

TIPO - TYPE		P ₂ nom.		P ₁ (kW) max.		AMPERE		Q = portata - débit - capacity - Fördermenge - caudal					
1 ~	3 ~					1 ~	3 ~	m³/h	0.6	1.2	1.8	2.4	3.0
		l/1'	10	20	30			40	50				
230 V - 50 Hz	230/400 V - 50 Hz	HP	kW	1 ~	3 ~	1 x 230 V	3 x 400 V	Prevalenza manometrica totale in m. C.A. Hauteur manométrique totale en m. - Total head in meters w.c. Förderhöhe m. - Altura de impulsión manométrica total en m.					
INOXR 80	INOXRT 80	0.8	0.59	0.78	0.79	3.6	1.4	37	29.5	17	7	-	
INOX 80	INOXT 80	0.8	0.59	0.79	0.79	3.7	1.4	39	32	20	11	-	
INOX 100	INOXT 100	1	0.74	0.98	1	4.6	2.2	43	38	32	26	15	

TIPO TYPE	Dimensioni mm Dimensions mm Dimensions mm Masstabelle mm Dimensiones mm										Dimensioni imballo mm Dimensions d'emballage mm Packing dimensions mm Verpackungsmasse mm Dimensiones embalaje mm			Peso Poids Weight Gewicht Peso
	A	B	C	D	E	F	H1	H2	DNA	DNM	I	L	M	Kg
INOXR 80	165	79	352	175	140	175	150	199	1"G	1"G	400	210	235	7.9
INOX 80	165	79	360	175	140	175	150	199	1"G	1"G	400	210	235	8.7
INOX 100	165	79	360	175	140	175	150	199	1"G	1"G	400	210	235	9.9

- **serie INOX**
elettropompe autoadescenti
1 girante (inox)
- **serie INOX**
electropompes auto-amorçantes
1 turbine (inox)
- **serie INOX**
self priming electric pumps
1 impeller (inox)
- **baureihe INOX**
Selbstansaugende Elektropumpen
1 Laufrad (inox)
- **serie INOX**
electrobombas autocebantes
1 rodete (inox)

